



## VOLTCON 0-5

- Transmitter of photocurrent to 0-5 V signal

### GENERAL FEATURES



#### Properties of the VOLTCON

The VOLTCON converts a photocurrent into an output voltage between 0 and 5 V and can be connected to any PLC system.


Three models with different measurement ranges are available. The amplification factor (gain) can be adjusted by a potentiometer. The measurement range can also be customized by replacing passive components (see description on page 2).

### SPECIFICATIONS

Parameter	Value
Photocurrent measurement range	VOLTCON_low 500 $\mu$ A available on request
	VOLTCON_med 5 $\mu$ A
	VOLTCON_high 100 nA available on request
Supply voltage	7* ... 24 V (*usable down to 5V, but this is not recommended)
Gain adjustment range	$\pm$ 35%
Dark output voltage	< 1 mV
Dimensions	13 x 26 x 8 mm (WxLxH)
Operating temperature	-20 ... +80 °C
Storage temperature	-40 ... +80 °C
Standards	RoHS 2 2011/65/EU, DIN IEC 60381-2

We strongly recommend to process this product on ESD protected workplaces.


### CONNECTION

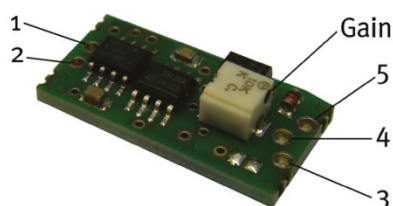

- 1 - Photodiode anode
- 2 - Photodiode cathode
- 3 - Signal output (connect to current input)
- 4 - GND power supply
- 5 - V+ power supply
- Gain - turn left to increase the gain



## CUSTOMIZATION OF MEASUREMENT RANGE

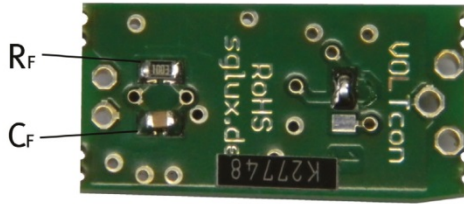

To modify the measurement range beyond the available adjustment range the feedback resistor  $R_f$  must be replaced. The adjustment range remains unaffected by this change.  $I_{max}$  is the designated maximum photocurrent to be measured.

$$R_{f,new} \text{ (in } M\Omega) = 5 / I_{max} \text{ (in } \mu A)$$

The capacitor  $C_f$  defines the time constant  $\tau$  of the measurement and may need modification too. By default  $\tau$  is 10 ms for all models. The required value of  $C_f$  can be calculated from  $R_{f,new}$  and the intended time constant:

$$C_f \text{ (in nF)} = \tau_{new} \text{ (in ms)} / R_{f,new} \text{ (in } M\Omega)$$

### Recommended values:

$10 \text{ k}\Omega \leq R_{f,new} \leq 3 \text{ G}\Omega$  and  $1 \text{ ms} \leq \tau \leq 200 \text{ ms}$ ,  $C_{f,new} \geq 33 \text{ pF}$ ,  
components package size 0805 (2.0 x 1.25 mm)

### Default component values:

Model	$R_f$	$C_f$
VOLTCON_low	10 k $\Omega$	1 $\mu$ F
VOLTCON_med	1 M $\Omega$	10 nF
VOLTCON_high	100 M $\Omega$	100 pF