




## SPM785-2W-105M-PDT-14P

- IR Fiber-pigtailed Laser Diode Module
- 785±10 nm, 2 W
- 105 µm Multi-mode Fiber
- Build-in PD and TEC
- 14-Pin Package

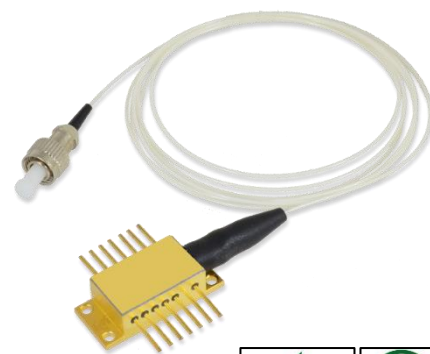

### Description

**SPM785-2W-105M-PDT-14P** is an infrared fiber-pigtailed laser diode module, typically emitting at 785 nm, with an output power of **2 W**. It comes in a 14-pin package with 105 µm multi-mode fiber and FC/PC connector, built-in TEC (thermo-electric cooler), thermistor and photodiode. Different fibers and connectors are optionally available.

### Maximum Ratings

Parameter	Symbol	Values		Unit
		Min.	Max.	
Reverse Voltage	$U_R$		2.0	V
Operating Temperature	$T_{OPR}$	+ 10	+ 30	°C
Storage Temperature	$T_{STG}$	- 20	+ 80	°C
Soldering Temperature (max. 3s)	$T_{SOL}$		+ 260	°C

### Electro-Optical Characteristics ( $T_{CASE} = 25^\circ\text{C}$ )

Parameter	Symbol	Values			Unit
		Min.	Typ.	Max.	
Peak Wavelength	$\lambda_P$	775	785	795	nm
Output Power	$P_O$		2		W
Spectral Width (FWHM)	$\Delta\lambda$		2.0		nm
Temperature Coefficient	$\alpha$		0.3		nm/°C
Operating Voltage	$V_F$		2.0		V
Threshold Current	$I_{th}$		1.2		A
Operating Current	$I_F$		4.0		A
TEC Current	$I_{TEC}$			2	A
TEC Voltage	$V_{TEC}$			8	V
Thermistor	$R$		10K		$\Omega$
Fiber spec.	Type		Multi-mode		
	Core		105*		µm
	Numerical Aperture		0.22		
	Connector *		FC/PC*		
	Length		80		cm



\* SC or SMA905 con. and 200, 400 µm core diameter available on request



## Electrical Connection


Pin Configuration\*

PIN #	Function	PIN #	Function
1	TEC +	14	TEC -
2	Thermistor	13	Case
3	PD +	12	n.c.
4	PD -	11	LD -
5	Thermistor	10	LD +
6	n.c.	9	n.c.
7	n.c.	8	n.c.



\* subject to change

## Outline Dimension

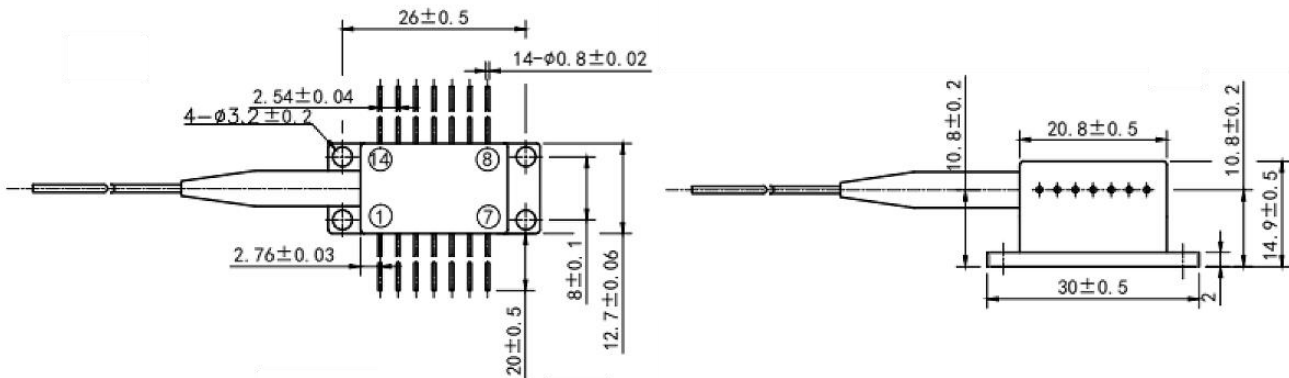

All dimensions in mm

## Precautions

### Safety

Laser light emitted from any laser diode may be harmful to the human eye. **Avoid looking directly into the laser diode's aperture.** The use of optical lenses will increase eye hazard



### ESD Caution

Always do handle laser diodes with care to **prevent electrostatic discharge.** We advise to **wearing wrist straps, and grounding all applicable work surfaces,** when handling laser diodes

### Operating Considerations

**Usage of current regulated drive circuits is mandatory** We advise to operate this laser diode with a current source and heat sink, and to never exceed the maximum specifications as outlined in this datasheet.

