




Lead (Pb) Free Product RoHS compliant

SMC470 consists of an InGaN LED mounted on the ceramics package and is sealed with silicone resin.
It emits a spectral band of radiation at 470nm.

◆ Specifications

- 1) Product Name SMD type Blue color LED
- 2) Type No. SMC470
- 3) Chip
 - (1) Chip Material InGaN
 - (2) Peak Wavelength 470 nm typ
- 4) Package
 - (1) Package Ceramics
 - (2) Lens Silicone resin

◆ Outer dimension (Unit: mm)

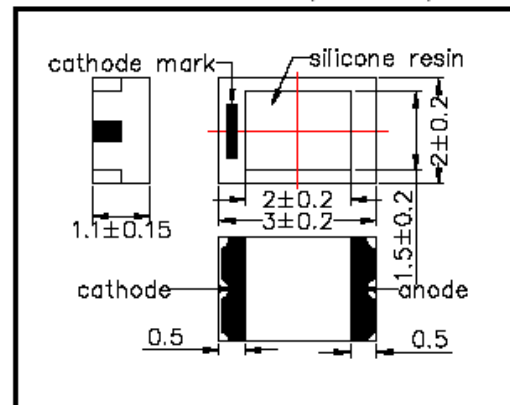

◆ Absolute Maximum Rating

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	P _D	120	mW	T _a =25°C
Forward Current	I _F	30	mA	T _a =25°C
Reverse Voltage	V _R	5	V	T _a =25°C
Operating Temperature	T _{OPR}	-20 ~ +85	°C	
Storage Temperature	T _{STG}	-30 ~ +100	°C	
Soldering Temperature	T _{SOL}	220	°C	

‡Pulse Forward Current condition: Duty=1% and Pulse Width=10us.

‡Soldering condition: Soldering condition must be completed within 3 seconds at 220°C

◆ Electro-Optical Characteristics [T_a=25°C]

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	V _F	I _F =20mA		3.80	4.30	V
Reverse Current	I _R	V _R =5V			10	uA
Total Radiated Power	P _O	I _F =20mA		3.5		mW
Brightness	I _v	I _F =20mA	100	200		mcd
Peak Wavelength	λ _P	I _F =20mA	460	470	480	nm
Half Width	Δλ	I _F =20mA		25		nm
Viewing Half Angle	θ _{1/2}	I _F =20mA		±55		deg.

‡Total Radiated Power is measured by Photodyne #500

‡Radiant Intensity is measured by Tektronix J-6512.