

TMC-8D31

GaAs PIN photodiode TO-46 metal can

FEATURES:

- Industry standard TO-46 package with cap lens.
- Optimized for fiber optic application.
- High coupling efficiency to multi-mode fibers directly.
- Low dark current and low capacitance.



ELECTRO-OPTICAL CHARACTERISTICS:

PARAMETERS	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITIONS
Responsivity ⁽¹⁾	R	0.3	0.4		A/W	$V_R=5V$, $\lambda=850nm$
Dark Current	I_D		1	2	nA	$V_R=5V$
Breakdown Voltage	V_{BD}		85		V	$I_R=10\mu A$
Bandwidth	BW	1.5			GHz	$V_R=5V$
Capacitance ⁽²⁾	C		1.2	1.5	pF	$V_R=5V$, $f=1$ MHz

Notes:

1. The responsivity is measured with a receptacle package, using an 850 nm VCSEL as the optical light source to the 50/125 or 62.5/125 μm multi-mode fibers.
2. Sensitive area is typical 120 μm in diameter.

ABSOLUTE MAXIMUM RATINGS:

PARAMETERS	MIN	MAX	UNIT	CONDITIONS
Storage Temperature	-40	125	$^{\circ}C$	
Operating Temperature	-40	85	$^{\circ}C$	
Lead Solder Temperature		260	$^{\circ}C$	10 seconds

Fig. 1 Typical Dark Current and Forward Current

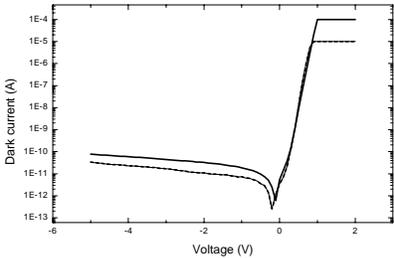


Fig. 2 Typical Photo-Current

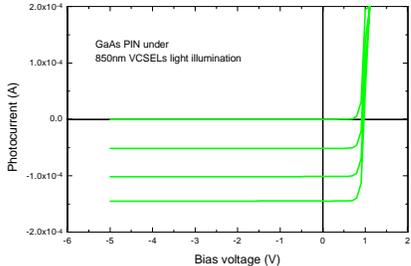


Fig. 3 Typical Breakdown Curve



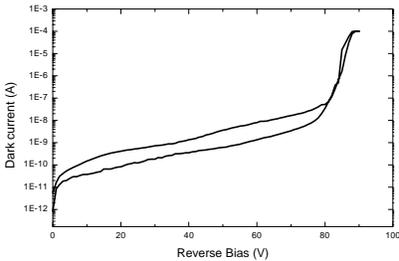


Fig. 4 Typical C-V Curve

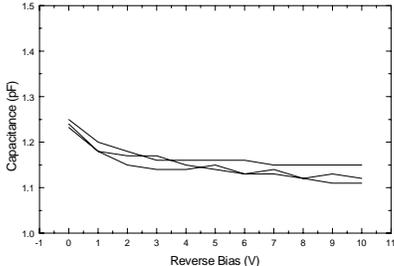

OUTLINE DIMENSIONS:

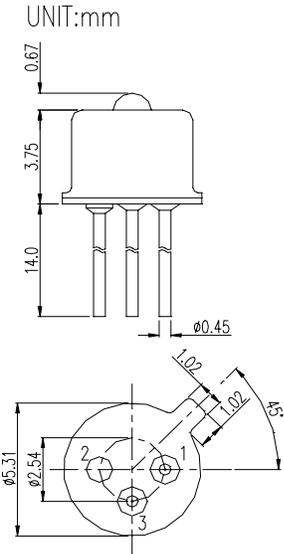

- Pinout
1. Anode
2. NC
3. Cathode