



## LD-450-2000MG

- Blue Laser Diode
- 447 nm, 2 W
- Multi-Mode
- ESD Protection
- 5.6 mm TO Package



### Description

**LD-450-2000MG** is a **blue multi transverse mode** laser diode, typically emitting at 447 nm, with max. allowed operating temperature of 85°C. **LD-450-2000MG** comes in 5.6 mm TO-Can package with **integrated ESD protection device**.

### Maximum Rating\*

Parameter	Symbol	Values		Unit
		Min.	Max.	
Operating Temperature*	$T_{OPR}$	- 20	+ 85	°C
Storage Temperature*	$T_{STG}$	- 20	+ 100	°C
Junction Temperature	$T_J$		+ 135	°C
Soldering Temperature ( $t_{max} = 10$ s)	$T_{SOL}$		+ 260	°C

\* operating close to or outside these conditions may damage the device

### Electro-Optical Characteristics ( $T_{CASE} = 25^\circ\text{C}$ )


Parameter	Symbol	Values			Unit	
		Min.	Typ.	Max.		
<b>Peak Wavelength</b>	$\lambda_P$	<b>435</b>	<b>447</b>	<b>460</b>	<b>nm</b>	
Spectral Linewidth	$\lambda_\Delta$		2		nm	
Optical Output Power	$P_O$		2		W	
Operating Voltage	$V_F$		4.6	5.9	V	
Threshold Current	$I_{th}$		0.1	0.3	A	
Operating Current	$I_F$		1.2	1.4	A	
Polarization (TE)	$P_{TE}$		100:1			
Beam Divergence (FWHM)	parallel	$\Theta_{  }$	6	10	13	deg.
	perpendicular	$\Theta_{\perp}$	40	48	56	deg.




### Electrical Connection

#### Pin Configuration

Pin #	Function
Pin 1	LD Anode
Pin 2	Case
Pin 3	LD Cathode




#### Bottom View





## Outline Dimensions

### 5.6 mm TO-Can

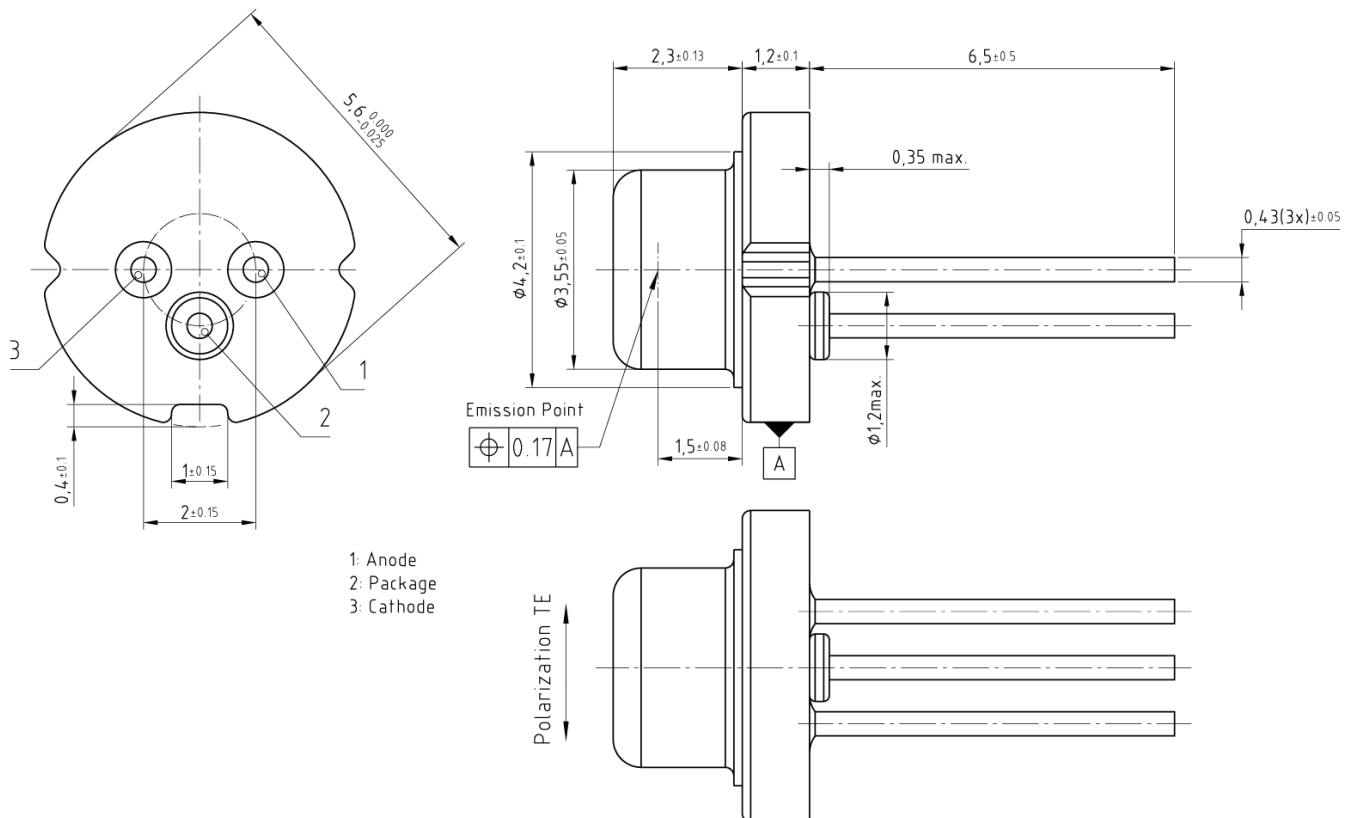

All dimensions in mm

## Precautions

### Safety

**Caution:** Laser light emitted from any laser diode may be **harmful to the human eye**. Avoid looking directly into the laser diode's aperture when the diode is in operation.

**Note:** The use of optical lenses with this laser diode will increase eye hazard

### ESD caution

Always do handle laser diodes with extreme care to **prevent electrostatic discharge**, the primary cause of unexpected diode failure. To prevent ESD related failures, we do advise to always **wearing wrist straps**, and **grounding all applicable work surfaces**, when handling laser diodes

### Operating considerations

We do advise to operate this laser diode with a current source only. The current of a laser diode is an exponential function of the voltage across it. **Usage of current regulated drive circuits is mandatory**. Laser diodes may be damaged by excessive drive currents or switching transients

**Proper heat sinking will greatly enhance stability and lifetime of the laser diode**