



## S6430MG

- Red Laser Diode
- 640 nm, 30 mW
- Multi Mode
- 5.6mm TO-Can with PD
- Flat window cap



### Description

**S6430MG** is a red laser diode emitting at typically 640 nm with rated output power of 30 mW cw, in a standard 5.6 mm TO package with integrated monitor photodiode and flat window cap.

### Maximum Ratings (T<sub>CASE</sub> = 25°C)

Parameter	Symbol	Values		Unit
		Min.	Max.	
Output power	$P_o$		30	mW
LD Reverse Voltage	$V_R$		2	V
PD Reverse Voltage	$V_{RPD}$		30	V
Operating Temperature	$T_{CASE}$	- 10	+ 50	°C
Storage Temperature	$T_{STG}$	- 40	+ 85	°C


### Laser Characteristics (T<sub>CASE</sub> = 25°C, P<sub>O</sub>=30mW)

Parameter	Symbol	Min.	Values		Unit
			Typ.	Max.	
Emission Wavelength	$\lambda_{peak}$	630	640	645	nm
Threshold Current	$I_{th}$		50	60	mA
Operating Current	$I_F$		90	105	mA
Operating Voltage	$V_F$		2.3	2.5	V
Beam Divergence (FWHM)	Parallel	7	8.5	11	deg.
	Perpendicular				$\theta_{\perp}$
Slope Efficiency (22.5mW-7.5mW)	$\eta$	0.5	0.75		mW/mA
PD Monitor Current	$I_m$	0.05	0.16	0.5	mA




## Performance Characteristics


### Optical Output Power vs Forward Current



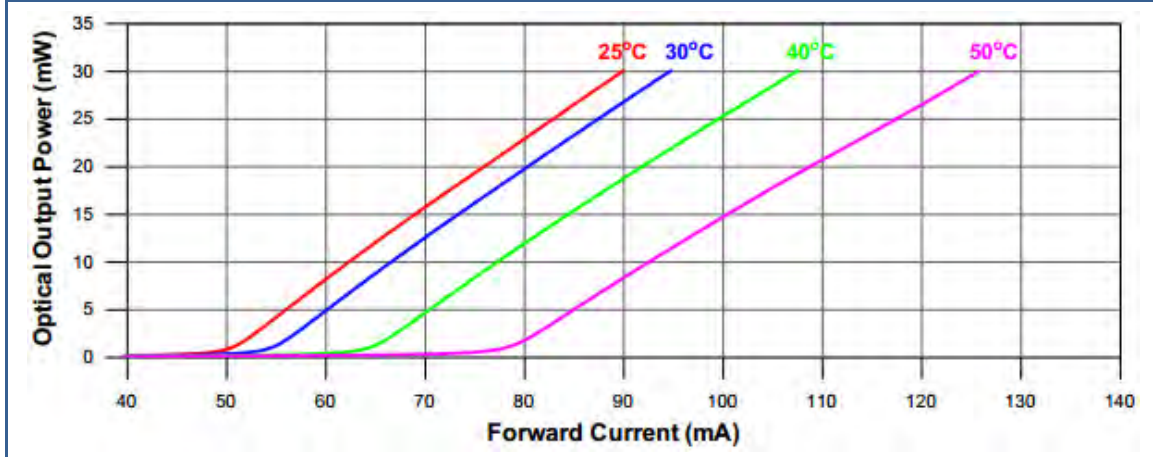


### Forward Voltage vs. forward Current

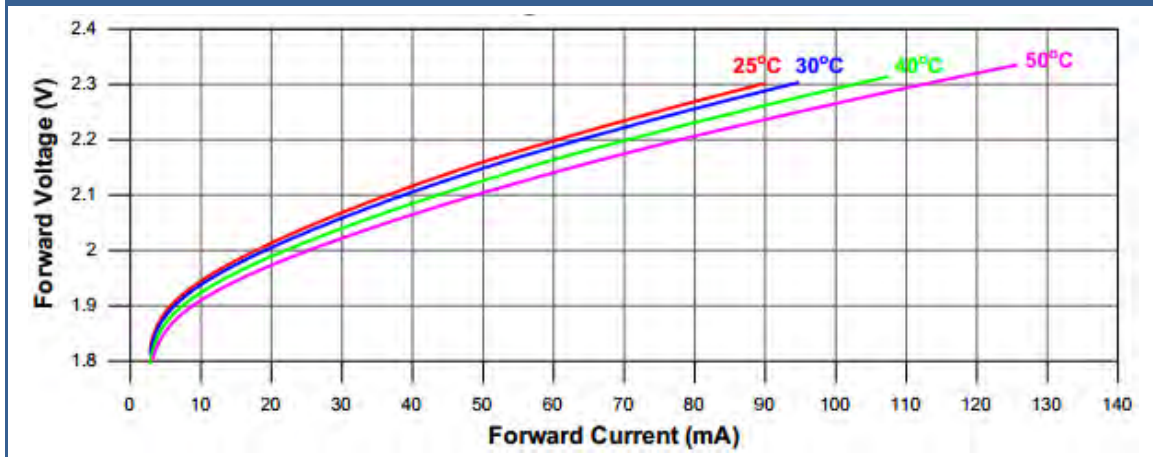


### Peak Wavelength vs. Case Temperature

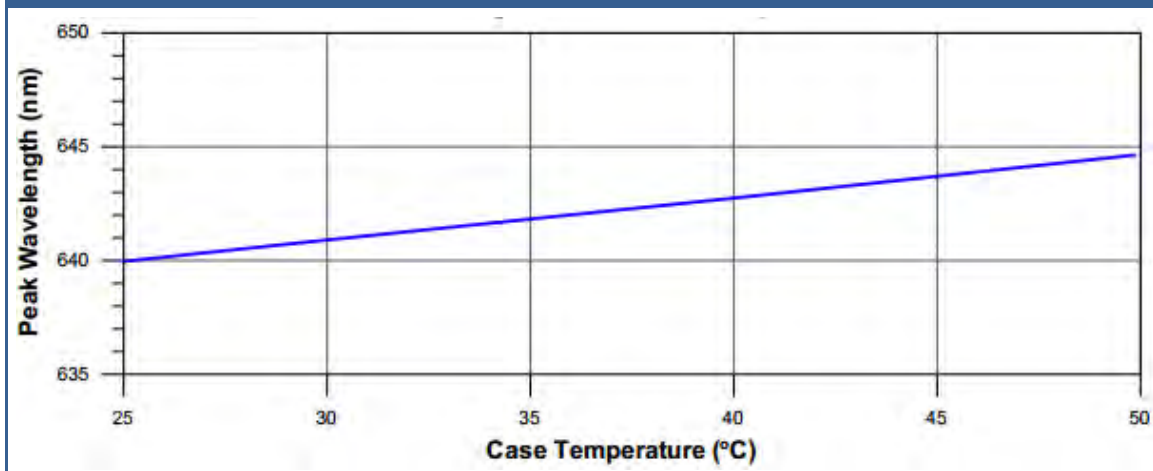

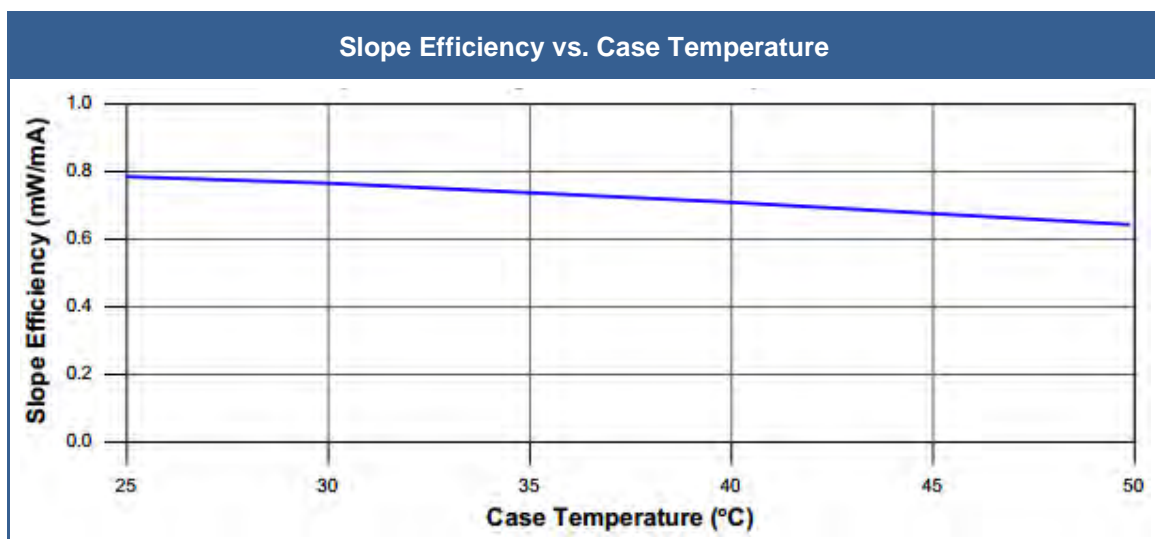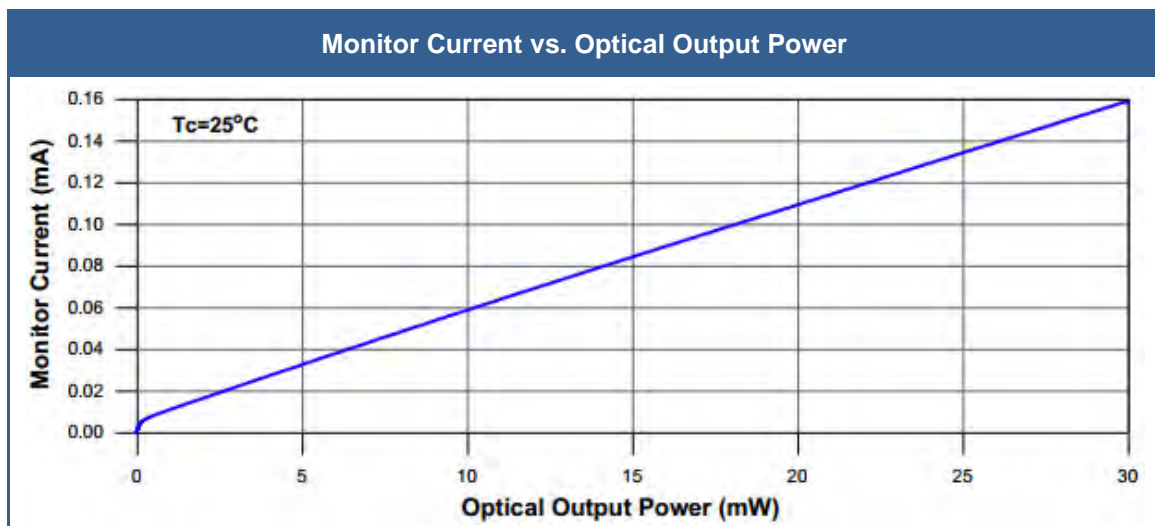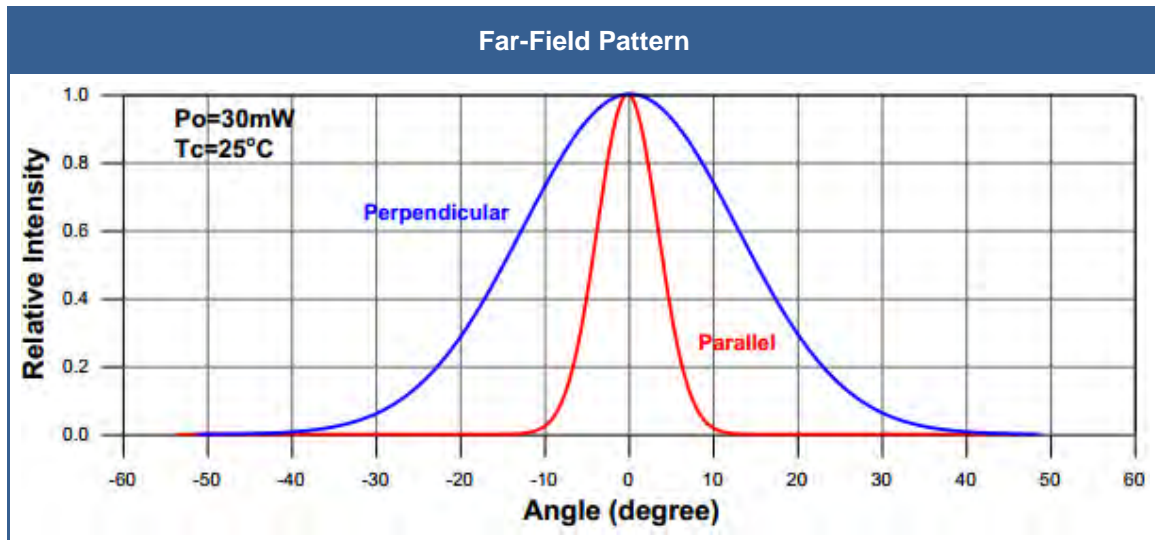




## Threshold Current vs. Case Temperature

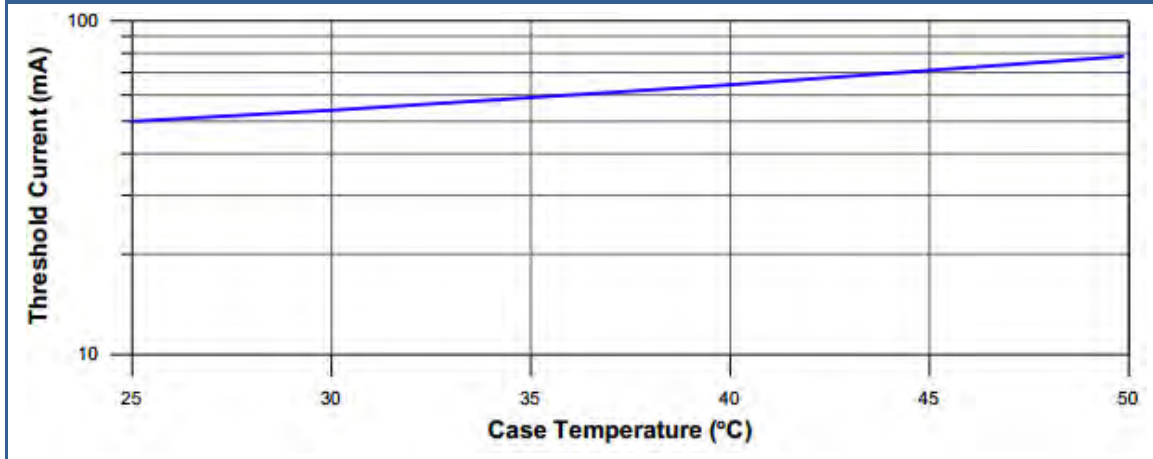


## Drawing

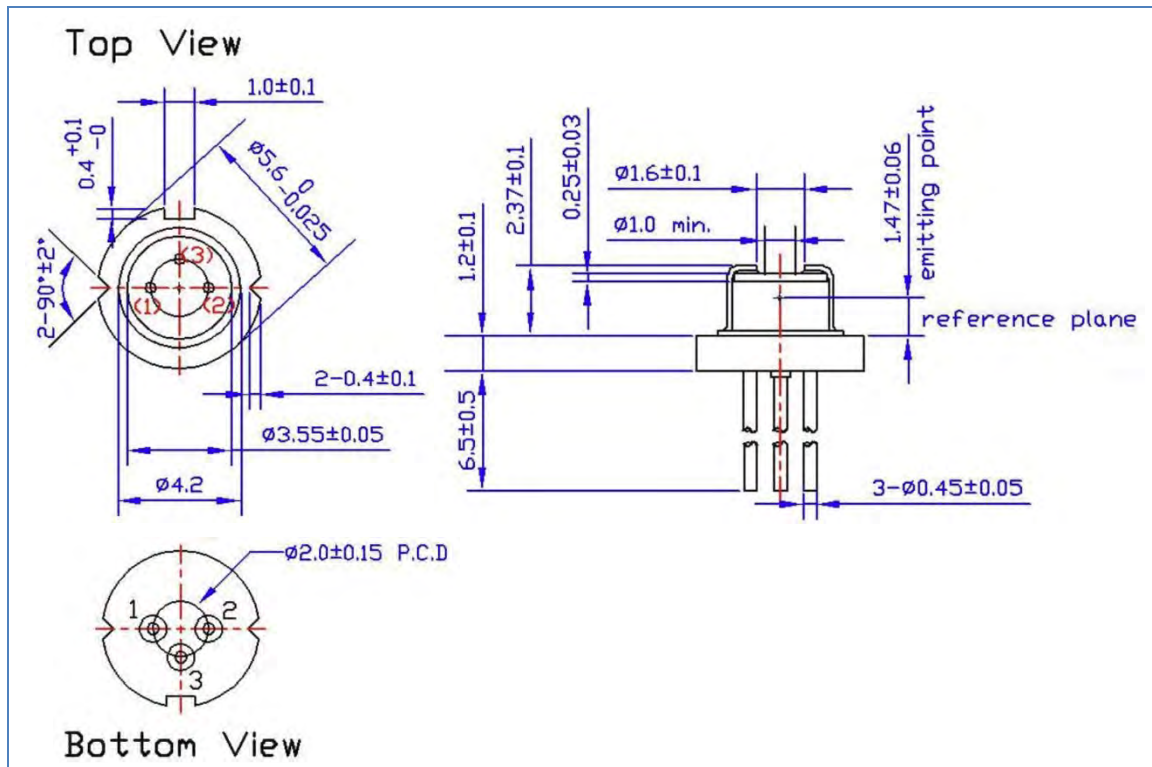

All dimensions in mm

## Electrical Connection

Lead	Description
Pin 1	PD Anode
Pin 2	LD Cathode
Pin 3	LD Anode, PD Cathode, Ground






## ESD Caution

Always do handle laser diodes with extreme caution to prevent electrostatic discharge, the primary cause of unexpected diode failure. ESD failures can be prevented by always wearing wrist straps, only using a grounding workplace, and following strict anti-static guidelines when handling the laser diode



## Safety Advice

This laser diode emits highly concentrated red light which can be **hazardous to the human eye and skin**. This diode is classified as **CLASS 3 laser product** according to IEC 60825-1 and 21 CFR Part 1040.10 Safety Standards.

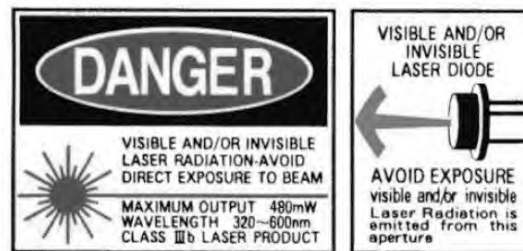

This product is comply with 21 CFR Part 1040.10

## Operating Considerations

Operating the laser diode outside of its maximum ratings may cause failure or a safety hazard. The diode may be damaged by excessive drive currents or switching transients. If the diode is operated using a power supply, it is strongly recommended to connect the diode with the output voltage set to zero. The voltage should then be increased slowly and with great caution, while at the same time carefully monitoring the laser diodes output power and drive current. The laser diode will show accelerated degradation with increased temperature, and it is advised to keep the case temperature low therefor, by means of heat sinking the device.