

ROITHNER LASERTECHNIK GmbH

TEL. +43 | 586 52 43 -0, FAX. -44 OFFICE@ROITHNER-LASER.COM



V 6.0

SIC01M-5LENS

- Broadband UVA+UVB+UVC SiC photodiode for very weak radiation, PTB tested high chip stability
- Radiation sensitive area: 11 mm² (chip size: 0.2 mm²)
- TO5 hermetically sealed metal housing with lens cap
- 10mW/cm² → photocurrent of ~1660nA



Description



SiC provides the unique property of extreme radiation hardness, near-perfect visible blindness, low dark current, high speed and low noise. These features make SiC the best available material for visible blind semiconductor UV detectors. The SiC detectors can be permanently operated at up to 170°C (338°F). The temperature coefficient of signal (responsivity) is also low, <-0.1%/K. Because of the low noise (dark current, in the fA range), very low UV radiation intensities can be measured reliably. Please note that this device needs an appropriate amplifier (see circuit on following page). SiC photodiodes are available as unfiltered broadband devices or with optical filters providing UV-A, UV-B, or UV-C-only sensitivity, or erythemal action curve compliance.

Maximum Ratings (T= 25°C)

Davamatav	Symbol	Val	Heit	
Parameter		Min.	Max.	Unit
Reverse Voltage	U_R	+20		V
Operating Temperature	T_{opr}	-55	+170	°C
Storage Temperature	T_{stg}	-55	+170	°C
Soldering Temperature (max. 3s)	T _{sol}		+260	°C

General Characteristics (T = 25°C)

Parameter	Symbol	Values			Unit
Parameter		Min.*	Тур.*	Max.*	Unit
Sensitive Area	Α		11		mm²
Dark current (1V reverse bias)	I _d		0.07		fA
Capacitance	С		50		pF
Short circuit (10mW/cm² at peak)	I _D		1660		nA
Temperature coefficient	Tc			-0.1	%/K

Spectral Characteristics (T = 25°C)

Dovemeter	Cumbal	Values			Unit
Parameter	Symbol	Min.*	Тур.*	Max.*	Unit
Max. spectral responsivity	S _{max}	0.085		0.130	AW ⁻¹
Wavelength of max. spectral resp.	λ_{max}		280		nm
Responsivity range (S=0.1*S _{max})	-	220		360	nm
Visible blindness (S _{max} / S _{>405nm})	VB		10 ¹⁰		-

www.roithner-laser.com





ROITHNER LASERTECHNIK GMBH

WIEDNER HAUPTSTRASSE 76 IO40 VIENNA AUSTRIA
TEL. +43 I 586 52 43 -0, FAX. -44 OFFICE@ROITHNER-LASER.COM



Performance Characteristics

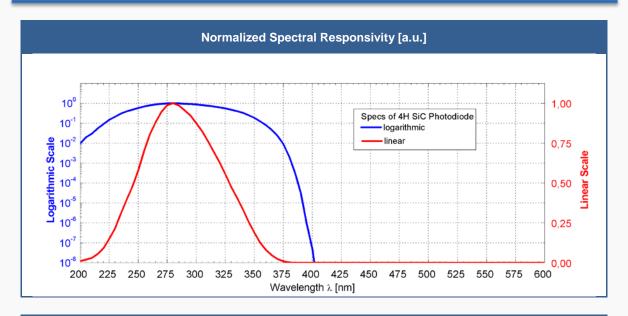



Measurement Setup

lamp aperture diameter: 10 mm

distance lamp aperture to second aperture: 17 mm

second aperture diameter: 10 mm

distance second aperture to detector: 93 mm

pivot level = top surface of the photodiode window

Product Portfolio


We offer the following selection of UV Photodiodes:

Option	UV sensitivity	Detector area	Max. spectral responsivity	
			min.	max.
SIC01S-18	UV broadband	0.06 mm ²	0.085 AW ⁻¹	0.13 AW ⁻¹
SIC01S-C18	UVC	0.06 mm ²	0.066 AW ⁻¹	0.10 AW ⁻¹
SIC01S-C5	UVC	0.06 mm ²	0.066 AW ⁻¹	0.10 AW ⁻¹
SIC01S-18ISO90	UV broadband	0.06 mm ²	0.085 AW ⁻¹	0.13 AW ⁻¹
SIC01M-18	UV broadband	0.2 mm ²	0.085 AW ⁻¹	0.13 AW ⁻¹
SIC01M-5Lens	UV broadband	0.2 mm ²	0.085 AW ⁻¹	0.13 AW ⁻¹
SIC01M-C5	UVC	0.2 mm ²	0.066 AW ⁻¹	0.10 AW ⁻¹
SIC01L-18	UV broadband	1.0 mm ²	0.085 AW ⁻¹	0.13 AW ⁻¹
SIC01L-5	UV broadband	1.0 mm ²	0.085 AW ⁻¹	0.13 AW ⁻¹
SIC01L-C5	UVC	1.0 mm ²	0.066 AW ⁻¹	0.10 AW ⁻¹
SIC01XL-5	UV broadband	4.0 mm ²	0.085 AW ⁻¹	0.13 AW ⁻¹

Amplified photodiodes (TIAMO series) are also available.


www.roithner-laser.com 2

Outline Dimensions

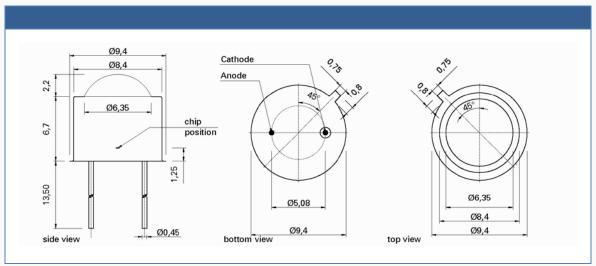

All dimensions in mm

Circuit

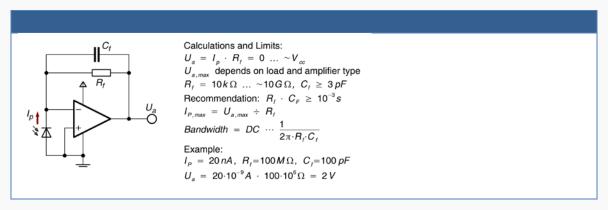

Application Note

For correct reading of the photodiode the current (and NOT the voltage) must be analyzed. This requires a short circuiting of the photodiode. Usual approaches are using a Picoamperemeter or a transimpedance amplifier circuit as shown above.

To make the photodiode running reliably, particularly in harsh environment, EMC compatibility and protection against dust, water, and mechanical influences is required. Below listed modules base on a SiC photodiode and guarantee this protection and safety.

UVTIAMO: SiC photodiodes with **integrated amplifier** (0-5V output), available for power intensities ranging from 1.8 pW/cm² to 18 W/cm² for UV broadband, UVA, UVB, UVC or Erythema (UV-Index) measurements. **No additional amplifier needed, direct connection to voltmeter, controller, etc.**

UV-probe: SiC based sensor modules in **customizable industry grade housings** (e.g. cosine response, water pressure proof, sapphire windows) and **different electronic output configurations** (voltage, current, USB, Can, LAN) to choose from.

→ Ask us for further details!